

# Depth gauge

# S\_Depth PRO

## DESCRIPTION

- PRESET function
- Automatic switching of measuring direction
- Setting of the «constant» for measurement with cylindrical or spherical anvils
- Additional bases available (see accessories)

Digital rotating display LCD

Automatic reference switching (REFI/ REFII) by the measurement inversion

Clamping knob

Base 100mm with clamping system for additional bases.




Measuring anvil with pin  $\varnothing$  4 mm (measuring ball probe M2.5 in standard)

# Depth gauge

# S\_Depth PRO

## DIMENSIONAL DRAWING

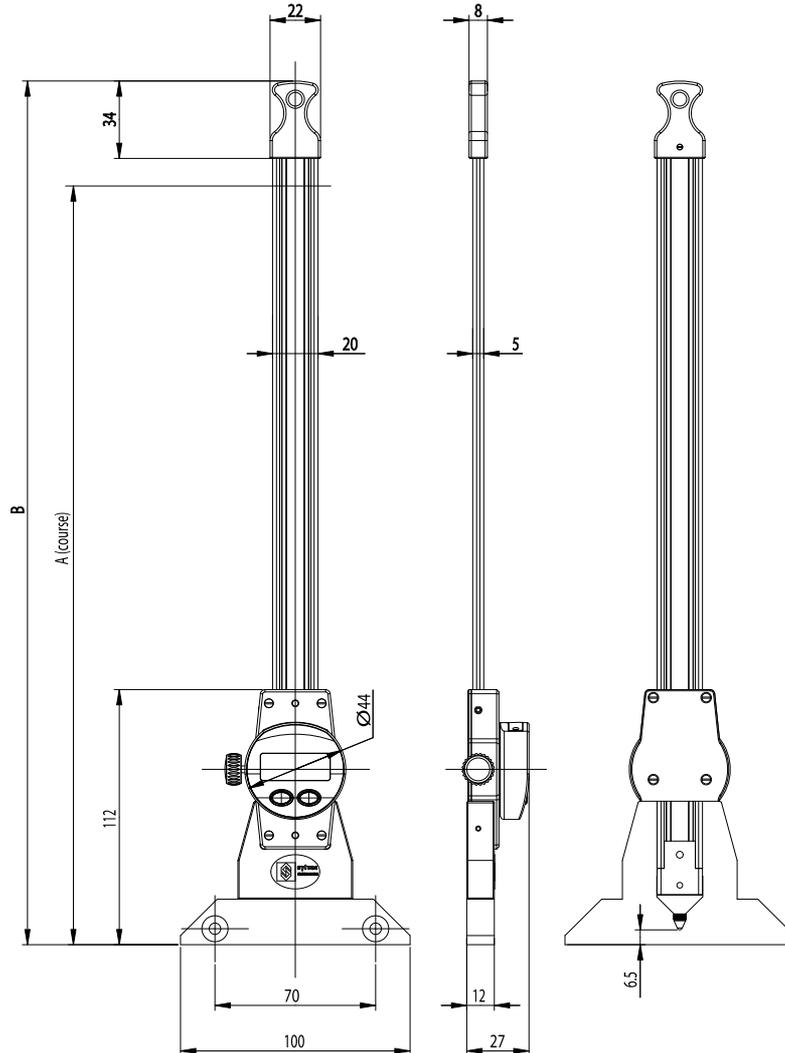

## TECHNICAL SPECIFICATIONS

		805.6005	805.6006
Measuring range	mm	300	600
Max. Error	µm	30	40
Repeatability <sup>1)</sup>	µm	10	10
A	mm	335	545
L	mm	483	693
S_Connect : Power		USB / RS232 / Wireless <sup>2)</sup>	
2 References		●	
PRESET function		●	

<sup>1)</sup> ± 1 digit

<sup>2)</sup> see cables chapter

# Depth gauge

# S\_Depth PRO


## BASIC INSTRUMENT

- Instrument according to technical specifications
- Lithium battery CR2032 included
- Instruction manual

## COMPATIBLE ACCESSORIES

			Length
	<b>805.2180</b>	Additionnal base	180 mm
	<b>805.2260</b>	Additionnal base	260 mm
	<b>805.2320</b>	Additionnal base	320 mm
	<b>805.6101</b>	Ball probe M2.5 (standard)	
	<b>805.6102</b>	Anvils UP&DOWN	
	<b>805.6103</b>	Anvil with pin Ø4 mm	

## APPLICATIONS

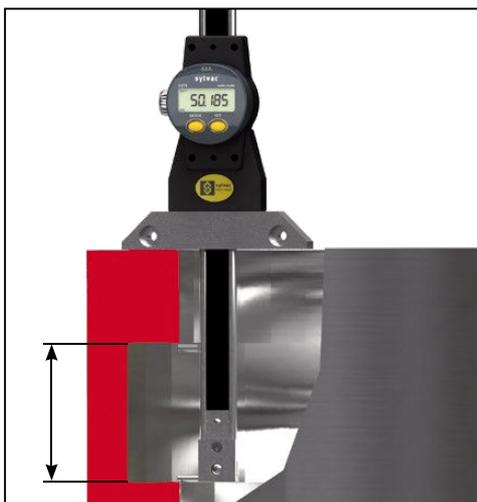

Measure of an internal groove (height) thanks to the constant.